ITEM #		
MODEL #		
NAME #		
SIS#		
ΔΙΔ #		



Crosswise Convection

Gas Convection Oven, 10 GN1/1

260701 (FCG101)

Gas convection oven 10x1/1GN, crosswise

Short Form Specification

Item No.

Main structure in stainless steel, with seamless joints in the oven cavity. Double-glazed door with tempered glass. Cavity lighting. Unique air-flow channel system.

Cooking cycles: air convection, convection with 5 stage humidification. Max. temperature of $300^{\circ}\text{C}.$

Functional level: base, manual.

"Cross-wise" pan rack suitable for 10x1/1GN. The pan rack, fixed, can be converted into a roll-in rack by using an optional kit.

Supplied with n. 1 pan rack, 60mm pitch (made up of n. 2 side hangers).

Main Features

- IPX4 water resistance certification.
- Racks can be easily removed without the need for special tools.
- Unique air-flow system guarantees perfect distribution of heat throughout the oven cavity.
- Maximum temperature of 300°C.
- Food temperature probe available as accessory.
- · Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.

Construction

- · Height adjustable feet.
- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- Double-glazed door with tempered glass.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.


Included Accessories

• 1 of 60mm pitch side hangers 10x1/1GN gas oven (included with the oven)

PNC 922122





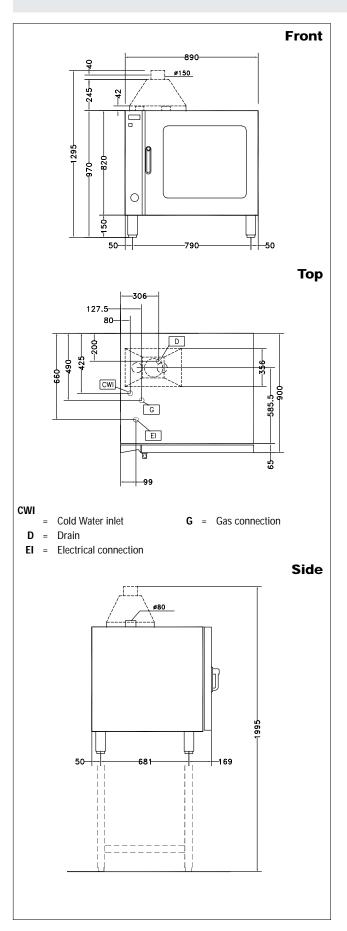

Crosswise Convection Gas Convection Oven, 10 GN1/1



Electric

Supply voltage:

260701(FCG101) 220/230 V/1N ph/50 Hz

Auxiliary: 0.35 kW **Connected load:** 0.35 kW

Gas

Gas Power: 63066.5 Btu/hr (18.5 kW)

Capacity:

Shelf capacity: 10

Key Information:

External dimensions, Height: 970 mm

External dimensions, Width: 890 mm

External dimensions, Depth: 900 mm

Net weight: 136 kg

Functional level: Basic;Manual

Type of grids: 1/1 Gastronorm

Runners pitch: 60 mm
Cooking cycles - air-convection: 300 °C
Internal dimensions, width: 590 mm
Internal dimensions, depth: 479 mm
Internal dimensions, height: 680 mm





Optional Accessories

• Pair of 1/1GN AISI 304 stainless steel grids			
 Support for 1/2GN pan (2pcs) 		921106 🗖	
 Automatic water softener for ovens 	PNC	921305 🗖	
 Resin sanitizer for water softener 	PNC	921306 🖵	
 Fat filter for gas 10 and 20 1/1 and 2/1 GN ovens (2 filters are necessary for 20-grid ovens) 	PNC	921700 🗖	
 Flue condenser for gas ovens 10x1/1-2/1 	PNC	921701 🗖	
 Probe for ovens 6 and 10x1/1GN 	PNC	921702 🖵	
Guide kit for 1/1GN drain pan	PNC	921713 🗖	
• Couple of grids for whole chicken 1/1GN (8 per grid)	PNC	922036 🗖	
 Base for oven 10x1/1GN 	PNC	922102 🗖	
 Shelf guides for 10x1/1GN, ovens base 	PNC	922106 🖵	
 Cupboard stand for oven 10x1/1GN 	PNC	922109 🗖	
 Hot cupboard stand for convection oven 10x1/1GN 	PNC	922112 🗖	
 Base on castors for 10x1/1GN ovens 	PNC	922114 🗖	
• 80mm pitch side hangers 10x1/1GN gas oven	PNC	922116 🗖	
 60mm pitch side hangers 10x1/1GN gas oven (included with the oven) 	PNC	922122 🗖	
• Feet for ovens 6x1/1GN, 10x1/1 and 2/1GN	PNC	922127 🗖	
 Trolley for 10x1/1GN roll-in rack 	PNC	922130 🗖	
• Thermal blanket for slide-in rack 10x1/1GN	PNC	922150 🗖	
 Retractable hose reel spray unit 	PNC	922170 🗖	
 Side external spray unit (needs to be mounted outside and includes support for mounting to oven) 	PNC	922171 🗖	
Water filter for ovens	PNC	922186 🖵	
• Frying griddle GN 1/1	PNC	922215 🗖	
2 frying baskets for ovens	PNC	922239 🗖	
• Grid for whole chicken 1/1GN (8 per grid - 1,2kg each)	PNC	922266 🗖	